


Tankless Electric Water Heaters

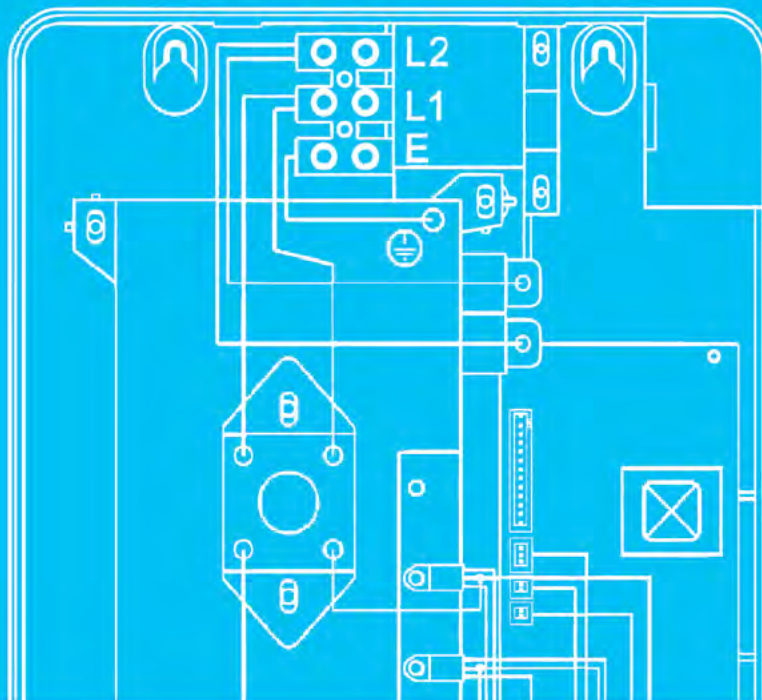

CP-9US ~ CP-27US

TANKLESS ELECTRIC WATER HEATER

Product Features

- High quality ABS case
- Microcomputer control, adapted with patented heating technology. Water is completely separated from electricity by multiple layers of nano composite insulation material
- Overheat protection, dry heating protection, automatic fault detection, child lock function, ground connection protection
- Conversion between degrees Celsius and degrees Fahrenheit
- Touch screen control sensor, smart Wi-Fi control and RF remote control available
- Zero cold water function, one of a kind, no need to wait for hot water
- Hot water tank reinforcement to help increase the performance of traditional gas, storage and solar water heaters



Technical data

Models	CP-9US - CP-27US					
Rated voltage	220-240V 50/60Hz					
Rated power	9kW	11kW	13kW	18kW	24kW	27kW
Rated current	33.3A	45.8A	57.5A	75A	100A	112.5A
Connection cables	10 AWG	8 AWG	6 AWG	2x8 AWG	3x8 AWG	3x8 AWG
Minimum circuit breaker required	40A	50A	70A	2x40A	3x40A	3x40A
Minimum water flow to activate	0.4 GPM	0.53 GPM	0.53 GPM	0.66 GPM	0.79 GPM	0.79 GPM
Color	Metallic gray					
Control	Touch Control + Smart Wi-Fi Control (Optional) + RF Remote Control (Optional)					
Nominal pressure	0.6MPa					
Temperature adjustment range	86 - 140° F / 30 - 60°C					
Water connections	NPT 1/2"			NPT 3/4"		
Product dimensions	358*246*85mm			488*282*102mm		