




Precision in Every Drop
Since 2006

Valves

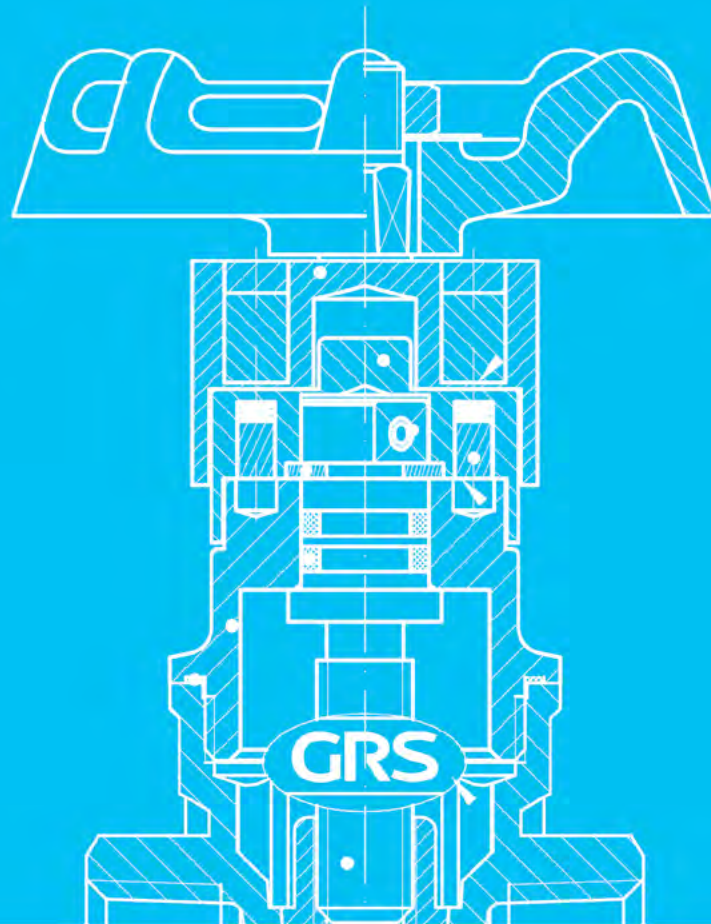

• USA • Guatemala • El Salvador • Honduras • Costa Rica • Nicaragua

VA-15 ~ 50 / LOCKABLE VALVE

Features

Nominal pressure: 1.6 Mpa
 Type of fluid in valve: Water, non-caustic liquid, saturated steam (0.6 Mpa)
 Temperature range: -10°C - 110°C
 Intel thread: ISO 228. NPT X NPT

Technical parameter

Model	A	B	C	D	E	G
VA-15	43.5	13	75.5	10.5	54	1/2
VA-20	47	17	83.2	11	54	3/4
VA-25	52	21	90.2	13	54	1

Model	A	B	C	D	G
VA-32	57	27	77.5	13.5	1 ^{1/4}
VA-40	60	34	90.3	14	1 ^{1/2}
VA-50	67	45	108.8	15	2

CERTIFICATIONS
ISO 45001: 2018
ISO 9001: 2015
ISO 14001: 2015

Dimensions expressed in millimeters.

Assembly drawing


Magnetic lock gate valve 5119.

Range	DWG No.	Name	Quantity	Material
12	119-15-07	Magnet	2	38H
11	GB/T 879.1.2.5X20	Cylindrical pin	1	Steel
10	119-15-03	Gland	1	HPb58-2A
9	119-15-04	Removable key steering wheel	1	Tin bronze
8	119-15-06	Dock	2	Tin bronze
7	GB 896 6	Retaining ring	1	1Cr18Ni9
6	T05-6.2X1.8	O-Ring	2	NBR
5	9119-15-01	Plug	1	HPb59-2A
4	To7-28X25X1.25	Packing	1	Teflon
3	119-15-05	Bottom	1	HPb59-2A
2	169-15-02	Disk	1	HPb59-2A
1	5119-15-01	Valve body	1	HPb59-2A



Technical parameter

The product test implements the industrial valve GB / T13927-2008.

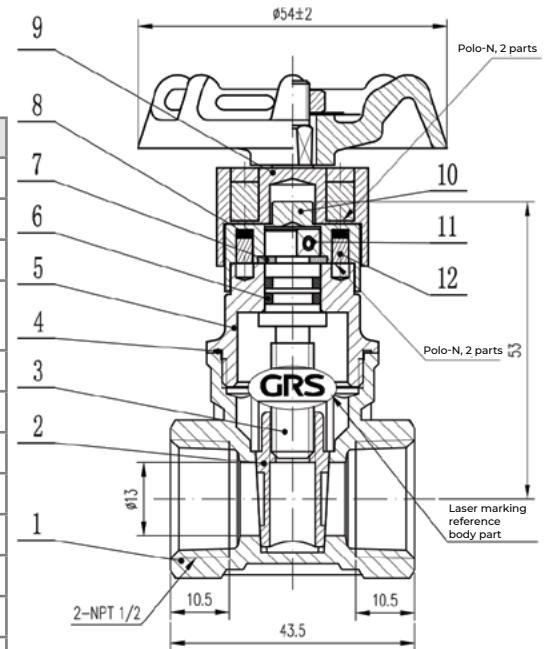

Warning!

Not recommended for steam service.



Precision in Every Drop
 Since 2006